

Twinwall Ducting




Manufactured from **High Density Polyethylene (HDPE)** and manufactured to **BS EN 61386-24:2010**, Twinwall ducting has a smooth internal bore, and a corrugated external wall providing excellent impact resistance, strength and durability.

Available in rigid **lengths** or flexible **coils**, all coils contain a draw string which a drawcord can be attached to. This enables the pipes and cables to be pulled through the duct after it has been installed. 90°, 45° & 22.5° **bends**, generally in black, are available from stock.

Loose couplers are available if there is a need to join sections together, although each coil and length is fitted with its own integral coupling.

Split Duct, for ducting existing cables, is available in OD 110 mm and above in 3m lengths and is supplied complete with a split coupler and suitable cable ties.

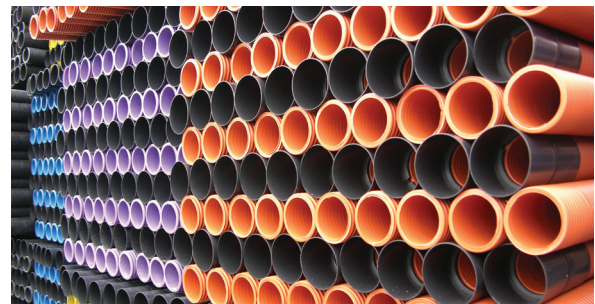

Colour	Usage
Black	Electric (stamped)/General Purpose
Blue	Water
Green	Communications
Orange	Street Lighting (stamped)/Traffic Signals (stamped)
Purple	Motorway Communications (stamped)
Yellow	Gas

Available sizes:

32/40mm - 50m	94/110mm - 50m
40/50mm - 50m	137/160mm - 25m
50/63mm - 50m	137/160mm - 50m
61/75mm - 50m	150/178mm - 6m
75/90mm - 50m	225/268mm - 6m
94/110mm - 6m	300/354mm - 6m

