


BS EN 1401 Pipe



uPVC “**terracotta**” coloured pipe designed for use in both domestic and commercial, foul water, gravity drainage and sewerage applications to a depth of 10m.

Perforated “terracotta” pipe can be used with septic tanks to disperse fluids into drainage fields, drainage mounds or constructed wetlands. In conjunction with a **Geotextile** membrane it also serves wastewater treatment plants.

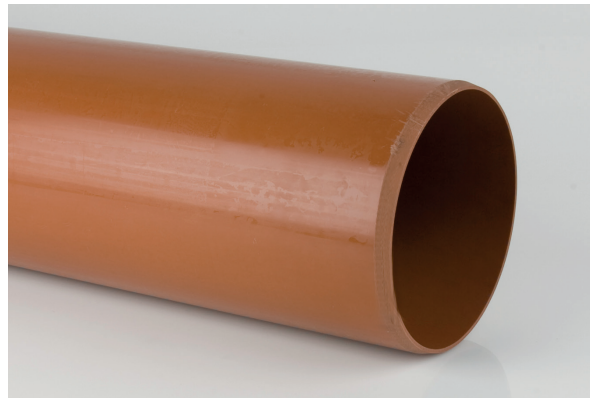

OD (mm)	Length	Plain Ended	Single Socket	Perforated
110	3m	✓	✓	×
	6m	✓	✓	✓
160	3m	✓	✓	✗
	6m	✓	✓	✓
200	3m	✓	✓	✗
	6m	✓	✓	✓
250	3m	✓	✓	✗
	6m	✓	✓	✓
315	3m	✓	✓	✗
	6m	✓	✓	✓